

125mm Aerfoam Insulated Duct 45° Bend



Centrotherm
solutions beyond

Article number: 188262




Product overview

The Aerfoam 125 mm 45° bend allows directional changes within the Aerfoam system. Made of expanded polyethylene (EPE) duct, it minimises the risk of condensation and energy loss. It is very light and extremely easy and safe to install. All Aerfoam parts connect to each other using strong, airtight mechanical connections. They can also be securely mounted to walls or ceilings using brackets. Aerfoam is ideal for both central mechanical ventilation and domestic hot water heat pump systems.

- Insulated to minimise the risk of condensation and energy loss.
- Easy mechanical connection and mounting.
- Lightweight and easy to cut, ensuring quick installation.
- Impact resistant.

Product dimensions

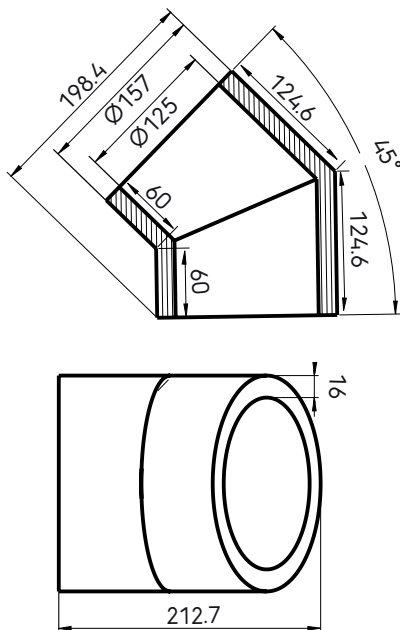

125mm Aerfoam Insulated Duct 45° Bend



Centrotherm
solutions beyond

Article number: 188262

Technical specifications

Technical	
Color	Gray
Insulated	☒
Diameter inner	125 mm
Diameter outer	157 mm
Insulation thickness	16 mm
Performance	
Insulation performance	0.041 W/m.K
Temperature resistance (min.)	-30 °C
Temperature resistance (max.)	60 °C
Installation temperature (min.)	-30 °C
Installation temperature (max.)	60 °C
Zeta supply 1 connection	0.53
Zeta extract 1 connection	0.53
Dimensions	
Length gross	198 mm
Width	157 mm
Height	212 mm
Net weight	0.04 kg

© 2026 Ubbink. All rights reserved. | Content is subject to change without notice. Availability and configurations may differ per country. | UB-25-06-2026-INT-EN

125mm Aerfoam Insulated Duct 45° Bend



Centrotherm
solutions beyond

Article number: 188262

Technical details

DN125 45° Elbow		
Zeta [-]	0,53	
Qv [m³/h]	Δp [Pa]	V [m/s]
50	0,41	1,13
100	1,63	2,26
150	3,67	3,4
200	6,52	4,53
250	10,18	5,66
300	14,66	6,79
350	19,96	7,92