# Contego Wall Terminal 180mm Black and Grey

Article number: 188842

Centrotherm
solutions beyond

ubbink

## Product overview

The Wall Terminal 180 mm is a metal terminal designed for use in central mechanical ventilation systems. Suitable for both supply and exhaust air, it connects directly to the Aerfoam insulated ducts and ensures efficient airflow between the ventilation unit and the outdoor environment. Its powder-coated finish provides long-lasting protection and UV resistance, while the front grille prevents birds and small animals from entering.

- Direct connection to Aerfoam insulated ducts
- Airtight mechanical connection
- Equipped with a protective mesh
- Powder-coated finish for long-lasting aesthetics and UV resistance

## Product dimensions

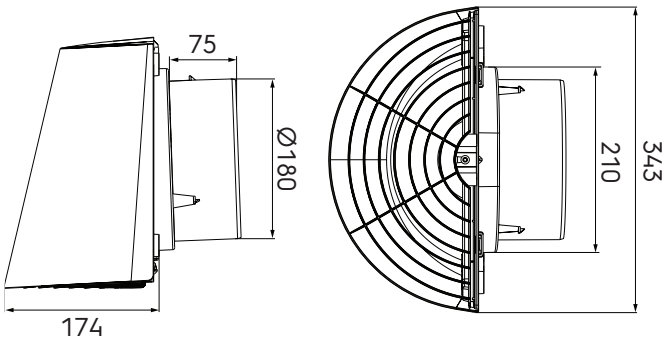


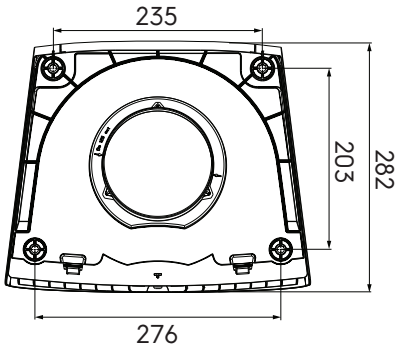

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country.| UB-25-06-2026-INT-EN

# Contego Wall Terminal 180mm Black and Grey

Article number: 188842

Centrotherm
solutions beyond

## Technical specifications

| Technical | |
|---|---|
| Color | Anthracite |
| Diameter | 180 mm |
| Airflow direction | Supply / extract |
| **Dimensions** | |
| Length gross | 266 mm |
| Width | 343 mm |
| Height | 282 mm |
| Net weight | 0.69 kg |

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-25-06-2026-INT-EN

# Contego Wall Terminal 180mm Black and Grey

Article number: 188842

Centrotherm
solutions beyond

## Technical details

| 180 mm | Air Supply | | Air Extract | |
|---|---|---|---|---|
| Zeta [-] | 1,19 | | 1,88 | |
| Qv [m³/h] | v [m/s] | Δp [Pa] | v [m/s] | Δp [Pa] |
| 0 | 0,0 | 0,0 | 0,0 | 0,0 |
| 50 | 0,5 | 0,2 | 0,5 | 0,3 |
| 100 | 1,1 | 0,8 | 1,1 | 1,3 |
| 150 | 1,6 | 1,9 | 1,6 | 3,0 |
| 200 | 2,2 | 3,3 | 2,2 | 5,3 |
| 250 | 2,7 | 5,2 | 2,7 | 8,3 |
| 300 | 3,3 | 7,5 | 3,3 | 11,9 |
| 350 | 3,8 | 10,2 | 3,8 | 16,2 |
| 400 | 4,4 | 13,4 | 4,4 | 21,1 |
| 450 | 4,9 | 16,9 | 4,9 | 26,8 |
| 500 | 5,5 | 20,9 | 5,5 | 33,0 |

© 2026 Ubbink. All rights reserved.| Content is subject to change without notice. Availability and configurations may differ per country. | UB-25-06-2026-INT-EN