

Air Excellent 1x AE34C Valve Adaptor 125mm 90° with mounting strip



Centrotherm
solutions beyond

Article number: 188972




Product introduction

The Air Excellent valve adaptor connects a single AE34C duct to a supply and/or extract valve. It can be cut to length and, when used with an AE34C Click-Seal ring, provides a secure and airtight duct connection. A mounting strip is included for easy fixing.

- Safe and quick installation with cut-to-length flexibility
- ATC1 airtight mechanical connection that minimises pressure losses, energy use, and fan noise
- Supplied with mounting strip for fast and secure fixing

Product dimensions

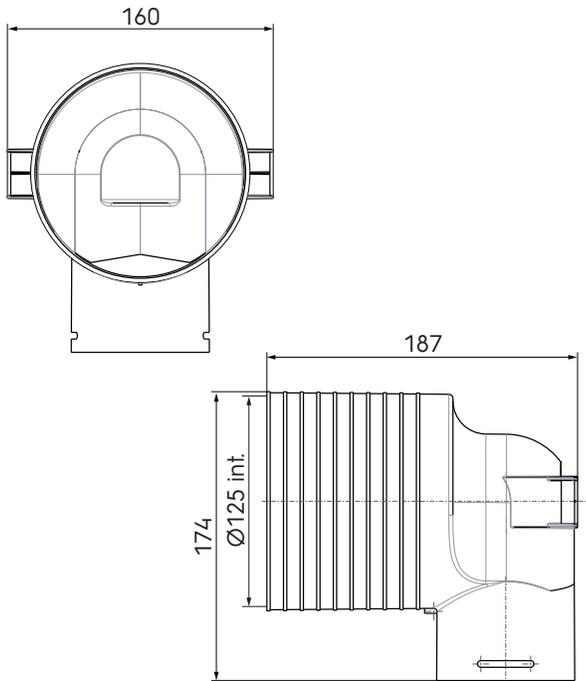

Technical specifications

Specifications	
Technical	
Color	Green
Anti static	<input checked="" type="checkbox"/>
Antimicrobial	<input checked="" type="checkbox"/>

Air Excellent 1x AE34C Valve Adaptor 125mm 90° with mounting strip



Centrotherm
solutions beyond

Article number: 188972

Technical specifications (continuation)

Technical	
Diameter inner	125 mm
Performance	
Temperature resistance (min.)	-20 °C
Temperature resistance (max.)	60 °C
Reaction to fire: Euro class	E
Zeta supply 1 connection	1.02
Zeta extract 1 connection	0.7
Dimensions	
Length gross	174 mm
Width	160 mm
Height	187 mm
Net weight	0.173 kg

© 2026 Ubbink. All rights reserved. | Content is subject to change without notice. Availability and configurations may differ per country. | UB-03-02-2026-INT-EN

Air Excellent 1x AE34C Valve Adaptor 125mm 90° with mounting strip



Centrotherm
solutions beyond

Article number: 188972

Technical details

Zeta [-]	Air Supply		Air Extract	
	0,70		1,02	
Qv [m³/h]	v [m/s]	Δp [Pa]	v [m/s]	Δp [Pa]
0	0,0	0,0	0,0	0,0
5	0,4	0,1	0,4	0,1
10	0,9	0,3	0,9	0,5
15	1,3	0,7	1,3	1,1
20	1,8	1,3	1,8	1,9
25	2,2	2,0	2,2	3,0
30	2,7	2,9	2,7	4,3
35	3,1	4,0	3,1	5,8
40	3,6	5,2	3,6	7,6
45	4,0	6,6	4,0	9,6
50	4,5	8,2	4,5	11,9
55	4,9	9,9	4,9	14,4
60	5,3	11,8	5,3	17,1
65	5,8	13,8	5,8	20,1
70	6,2	16,1	6,2	23,3
75	6,7	18,4	6,7	26,8
80	7,1	21,0	7,1	30,5
85	7,6	23,7	7,6	34,4
90	8,0	26,5	8,0	38,6
95	8,5	29,6	8,5	43,0
100	8,9	32,8	8,9	47,6
105	9,4	36,1	9,4	52,5
110	9,8	39,6	9,8	57,6
115	10,2	43,3	10,2	63,0
120	10,7	47,2	10,7	68,6
125	11,1	51,2	11,1	74,4
130	11,6	55,4	11,6	80,5
135	12,0	59,7	12,0	86,8

© 2026 Ubbink. All rights reserved. | Content is subject to change without notice. Availability and configurations may differ per country. | UB-03-02-2026-INT-EN