





## Adaptors

		
<b>PVC Adaptor</b>	<b>Gasket</b>	<b>Steel Adaptor</b>
ISAAL	ISAGL	ISSA




## Accessories


			
<b>Connector Ring</b>	<b>Support Clamp</b>	<b>Test Port</b>	<b>Bird Screen</b>
1 per fitting	Horizontal Every 39"	Vertical Every 78"	Recommended
IANS	IASCM	ISTP	IASPP

## Termination Options

		
<b>End Pipe</b>	<b>Snork/Snout</b>	<b>Horizontal Wall</b>
ISEP	See Back	ISLPT
		
<b>Term Tee</b>	<b>Chimney Cap</b>	
ISTT	ISCP	

## Concentric Adaptor → Termination Options

		
<b>Adaptor</b>	<b>Wall Term.</b>	<b>Roof Term.</b>
ICTCR	Based on Installation	
	ICWT	ICRT

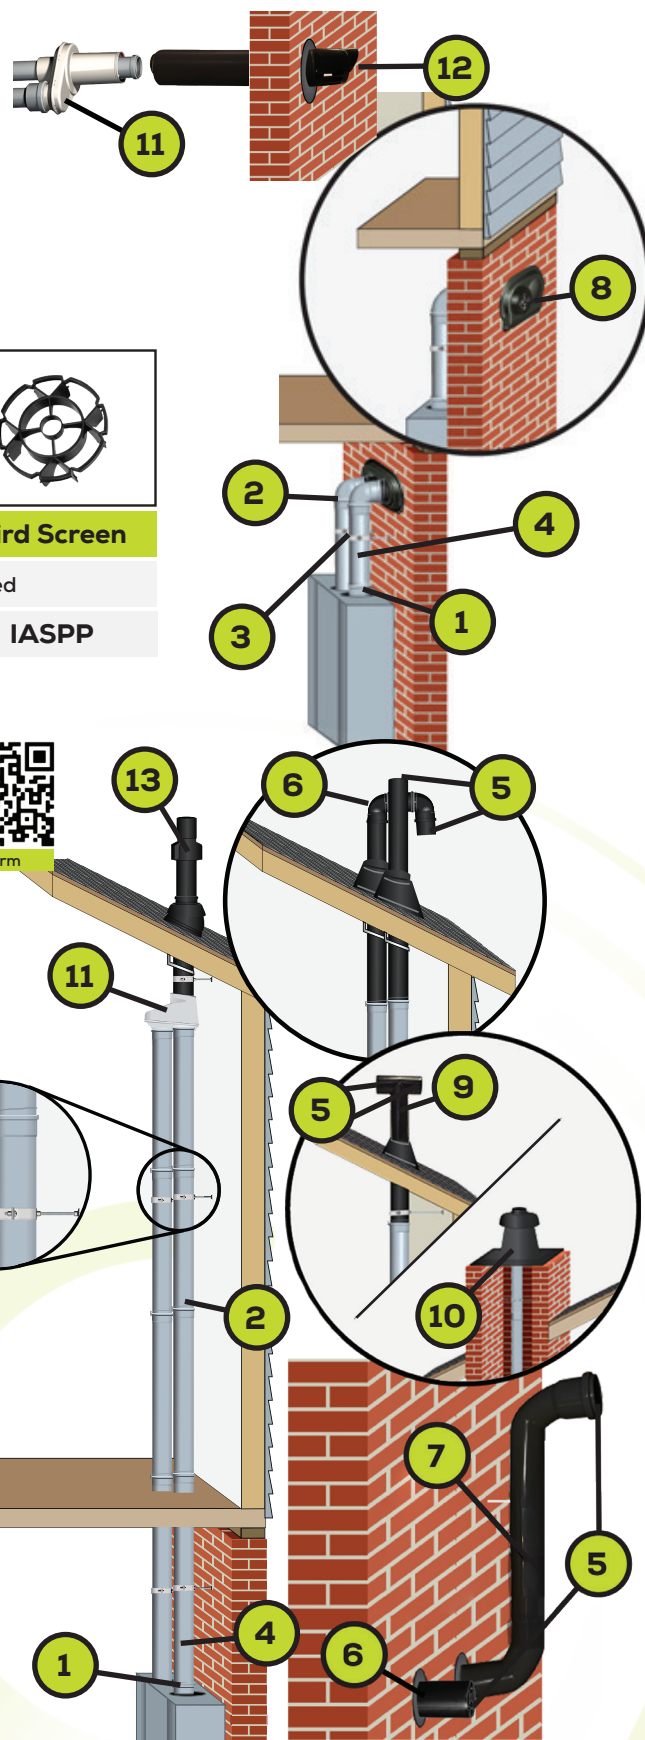

### Contact Us:

<http://centrotherm.us.com>  
[info@centrotherm.us.com](mailto:info@centrotherm.us.com)  
 518.434.3400

## Vent Lengths

InnoFlue never requires glues, solvents or primers. Each component has a socket, and a male/female fitting connection. Apply Centrocerin lubricant and push together.

	2"	3"	4"
1'	ISVL021	ISVL031	ISVL041
2'	ISVL022	ISVL032	ISVL042
3'	ISVL023	ISVL033	ISVL043
6'	ISVL026	ISVL036	ISVL046
10'	ISVL0210	ISVL0310	ISVL0410



## Lubricant



**Centrocerin**

IACE50

## Condensate Management



**Siphon**

IASJVBS



**Drain Fitting**

ISHDT



**Tee**

IST



**Tee Cap**

ISTCD

## Elbows

	2"	3"	4"
45°	ISELS0245	ISELS0345	ISELS0445
87°	ISELS0287	ISEL0387	ISELS0487
<b>LONG SWEEP</b> 87°	ISELL0287	ISELL0387	ISELL0487
45° <sub>UV</sub>	ISELS0245UV	ISELS0345UV	ISELS0445UV
87° <sub>UV</sub>	ISELS0287UV	ISEL0387UV	ISELS0487UV

**Two Minute Product Overview**




**Take the Factory Tour!**



**InnoFlue Flex Product Overview**



**Full I&O Manual**




**Condensate Management Guide**



**OEM Matrix**




## Other Useful Components



**EPDM Gasket**

ISGE

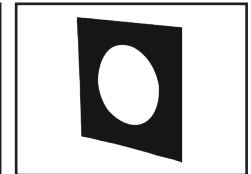

**Wall Plate**

IAWPP



**Increaser**

ISIA



**Reducer**

ISRDR



**NOTE:** Both gray and black InnoFlue components can be used outdoors. All InnoFlue components have passed the UV stability test (ASTM G23-81) relevant to UL listing.

**FIRST LISTED**

InnoFlue® is the first polymeric vent system tested and listed to **ULC-S636** and **UL-1738** in North America.

**NEXT Supply Contact**  
<https://nextsupply.ca/>  
 info@nextsupply.ca  
 289.982.NEXT(6398)