

125mm Aerfoam Insulated Duct 2m



Centrotherm
solutions beyond

Article number: 188202




Product introduction

The Aerfoam 125 mm Duct is made of expanded polyethylene (EPE), which minimises the risk of condensation and energy loss. It is very light and extremely easy and safe to install. All Aerfoam parts connect to each other using strong, airtight mechanical connections. They can also be securely mounted to walls or ceilings using brackets. Aerfoam is ideal for both central mechanical ventilation and domestic hot water heat pump systems.

- Insulated to minimise the risk of condensation and energy loss.
- Easy mechanical connection and mounting.
- Lightweight and easy to cut, ensuring quick installation.
- Impact resistant.

Product dimensions

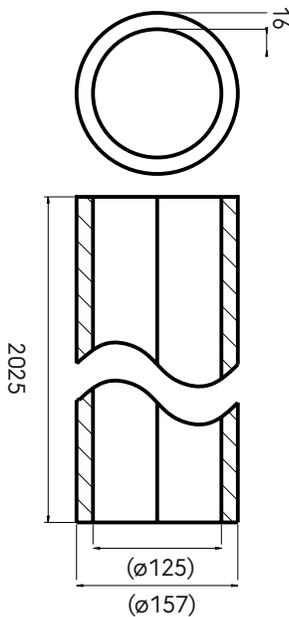

125mm Aerfoam Insulated Duct 2m



Centrotherm
solutions beyond

Article number: 188202

Technical specifications

Specifications	
Technical	
Color	Gray
Insulated	<input checked="" type="checkbox"/>
Diameter inner	125 mm
Diameter outer	157 mm
Insulation thickness	16 mm
Performance	
Insulation performance	0.041 W/m.K
Temperature resistance (min.)	-30 °C
Temperature resistance (max.)	60 °C
Zeta supply 1 connection	0.22
Zeta extract 1 connection	0.22
Dimensions	
Length gross	2000 mm
Width	157 mm
Height	157 mm
Net weight	0.4 kg

© 2026 Ubbink. All rights reserved. | Content is subject to change without notice. Availability and configurations may differ per country. | UB-03-02-2026-INT-EN

125mm Aerfoam Insulated Duct 2m



Centrotherm
solutions beyond

Article number: 188202

Technical details

Aerfoam duct		
Diameter	125	
Qv [m ³ /h]	v [m/s]	Δp [Pa]
100	2,3	1,0
200	4,5	2,7
300	6,8	6,1
400	9,1	10,8
500	11,3	16,9
600	13,6	24,3