

Air Excellent 2x AE34C Valve Adaptor 125mm 180°



Centrotherm
solutions beyond

Article number: 188399




Product introduction

The Air Excellent valve adaptor can connect up to two AE34C ducts to a supply and/or extract valve. It can be cut to length and, when used with the AE34C Click-Seal rings, provides a secure and airtight duct connection.

- Safe and quick installation with cut-to-length flexibility
- ATC1 airtight mechanical connection that minimises pressure losses, energy use, and fan noise
- Supplied with mounting strip for fast and secure fixing



Product dimensions

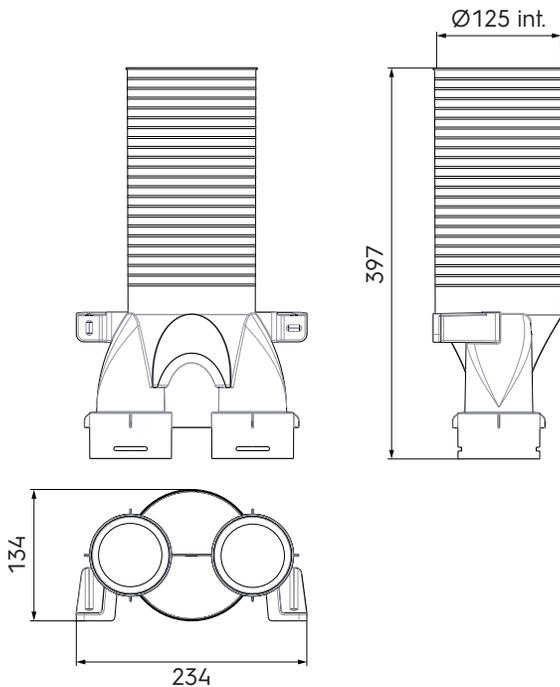

Technical specifications

Specifications	
Technical	
Color	Green
Anti static	<input checked="" type="checkbox"/>
Antimicrobial	<input checked="" type="checkbox"/>

Air Excellent 2x AE34C Valve Adaptor 125mm 180°



Centrotherm
solutions beyond

Article number: 188399

Technical specifications (continuation)

Technical	
Diameter inner	125 mm
Performance	
Temperature resistance (min.)	-20 °C
Temperature resistance (max.)	60 °C
Reaction to fire: Euro class	E
Zeta supply 1 connection	1.06
Zeta extract 1 connection	0.95
Dimensions	
Length gross	397 mm
Width	234 mm
Height	134 mm
Net weight	0.347 kg
Certification	
Certificates (EU)	TÜV TAK 01-2013

© 2026 Ubbink. All rights reserved. | Content is subject to change without notice. Availability and configurations may differ per country. | UB-03-02-2026-INT-EN

Air Excellent 2x AE34C Valve Adaptor 125mm 180°



Centrotherm
solutions beyond

Article number: 188399

Technical details

	Air Supply		Air Extract	
	Zeta [-]	Duct runs	Zeta [-]	Duct runs
Zeta [-]	1,06	0,59	0,95	1,10
Duct runs	1	2	1	2
Qv [m³/h]	Δp [Pa]	Δp [Pa]	Δp [Pa]	Δp [Pa]
5	0	0	0	0
10	0	0	0	0
15	1	0	1	0
20	2	0	2	1
25	3	0	3	1
30	4	1	4	1
35	6	1	5	2
40	8	1	7	2
45	10	1	9	3
50	12	2	11	3
55	15	2	13	4
60	18	2	16	5
65	21	3	19	5
70	24	3	22	6
75	28	4	25	7
80	32	4	28	8
85	36	5	32	9
90	40	6	36	10
95	45	6	40	12
100	50	7	45	13

© 2026 Ubbink. All rights reserved. | Content is subject to change without notice. Availability and configurations may differ per country. | UB-03-02-2026-INT-EN